


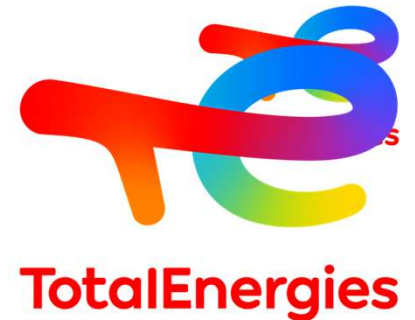

Obj1.1D: Analyze surface and subsurface constraints optimize oil production through identifying de-bottlenecking opportunities on Shah field

Kick-Off Meeting

Andrey Semenov, Olivier-Francois Garnier

PC26 Objective 1.1D



1.1D: Analyze surface and subsurface constraints optimize oil production through identifying debottlenecking opportunities on Shah field.

- Consider the back-pressure optimization opportunities
- Consider the optimization of the produced water distribution among reservoirs

Shah: field surface facilities constraints



SHAH SIMSIMA FACILITY HANDLING CAPACITIES


SHAH Field – Facilities Capacities at YE							
		2026	2027	2028	2029	2030	2031
Oil Capacity	MBD	84	84	84	84	84	84
Gas Handling	MMSCFD	6.5	6.5	6.5	6.5	6.5	6.5
Water Production	MBWPD	161 ⁽¹⁾	161	161	231 ⁽²⁾	231	231
Aq. Water Injection	MBWPD	48 ⁽³⁾	128 ⁽⁴⁾	128	128	128	128
PWRI Pilot	MBWPD	32 ⁽⁵⁾	32	32	32	32	32

1. Phase-2 effluent water handling capacity upgrade (+70 Mbwd) in Q4-2025/Q1-2026
2. Phase-3 effluent water handling capacity upgrade (+70 Mbwd) in Q2-2029
3. Total installed WI capacity is 48 MBWPD (24 MBWPD/cluster of WI Pilot)
4. WIP area extension (alpha): additional 2 SWICs of 60 MBWPD capacity (30 MBWPD/cluster) to execute with Package 4 (early 2027). WIP area extension (beta): 2 SAWIs (if proof of concept pilot success) of 20 MBWPD (10 MBWPD/well) to execute with SE One Tie In (mid-2027, subject to T&Aw schedule)
5. PWRI pilot RFC in Q3-2026 with 32 MBWPD capacity

Phase-3 water handling capacity upgrade



PHASE-3 WATER HANDLING CAPACITY UPGRADE PROJECT SCHEDULE

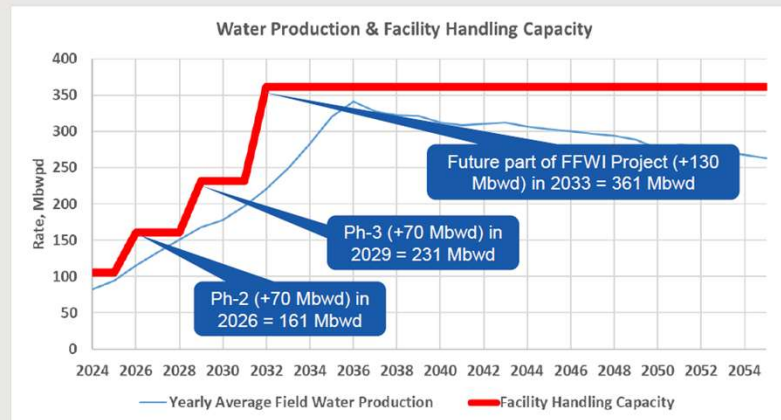

Ph-3 Effluent Water Handling Upgrade (+70 Mbwd)

G0

G1

G2

VAP Gates AW : Award

◆ RFC - Ready for Commissioning

★ PAC - Provisional Acceptance Certificate

Project Schedule	2025				2026				2027				2028				2029				2030				2031			
	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4
Overall Project Schedule				G0			G1			AW								◆ RFC	★ PAC									

- Gate-0 approved in Q4-2025.
- Submission of Gate-1 DSP by Q3-2026.
- RFC is possible by Q2-2029 (not by 2028) based on the installation of the new facilities which integrate with existing produced water handling and disposal facilities.

Shah: 2025-2026 production



2025:Simsima R1


SUMMARY OF PRODUCTION PERFORMANCE YEARLY AVERAGE							
RTR (YA), MBD	Actual OP (YE), MBD	2025 FSOPR, MBD	Cum. Oil (YE), MMSTB	GOR (YE), SCF/STB	WC (YE), %	Total Producers (YE)	Active Producers (YE)
33	30.0	31.5	262.1	75	46.3	69*	63

*: 3 new OP drilled and waiting for Tie-in (SY-118, SY-192, SY-196)

2025: Simsima R2

SUMMARY OF PRODUCTION PERFORMANCE YEARLY AVERAGE							
RTR (YA), MB	Actual OP (YE), MBD	2025 FSOPR, MBD	Cum. Oil (YE), MMSTB	GOR (YE), SCF/STB	WC (YE), %	Total Producers (YE)	Active Producers (YE)
39	35.4	40	401.1	73	66.4	56	50

*: 3 new OP drilled and waiting for Tie-in (SY-194 SY-198 and SY-97)

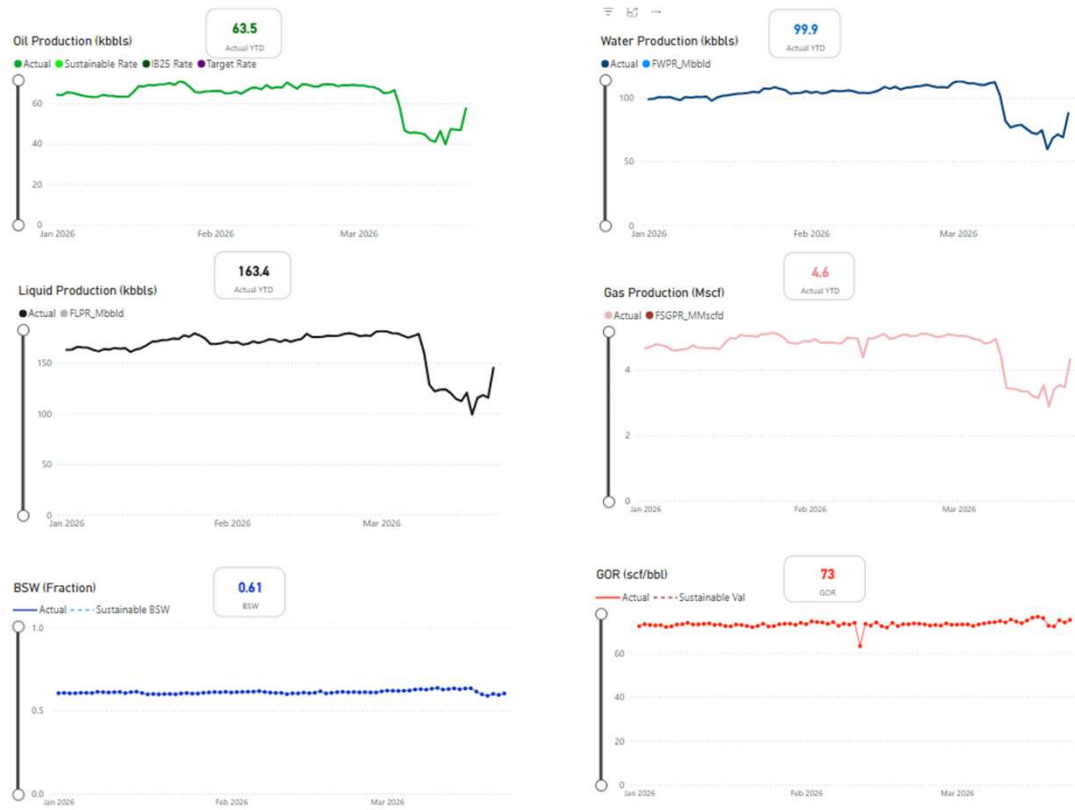

Scope of work proposal



- Definition of objective drivers
- Data acquisition
- Analysis of surface and subsurface constraints (capacity, guidelines, well productivity,...)
- Diagnostic of root causes of bottlenecking –definition of unconstraint
- de-bottlenecking opportunities study:
 - Consider the back-pressure optimization opportunities
 - Consider the optimization of the produced water distribution among reservoirs
 - Remediation proposal
- Workshop of alignment on study analysis and remediation proposal
- Results and added value evaluation

Data acquisition



- Vendor documents, PIDs, PFDs of the production system
- Current capacity (design and operation) of all the equipment in the production system
- Results of the performance tests (technical rate)
- Produced water system vendor document (PIDs, PFDs)
- Produced water analysis
- Pressure measurements during normal operation and during performance tests
- WHIP of the injection wells fct of time
- WHPP of the production wells fct of time



Required data

- January-2026 FCT report
- Surface process diagram
- Surface facilities simulation model (GAP/Prosper IPM)
- Historical production (MS Access DB Shah Simsima)
- Shareholder guidelines on well basis
- Latest version of G2V2 simulation model (ML#5 forecast case)

SE Obj. 1.1D Analyze surface and subsurface constraints optimize oil production through identifying de-bottlenecking opportunities on Shah field



Obj.	Description		Q1	Q2	Q3	Q4
1.1 D	Analyze surface and subsurface constraints optimize oil production through identifying de-bottlenecking opportunities on Shah field. - Consider the back-pressure optimization opportunities - Consider the optimization of the produced water distribution among reservoirs	SoW	• Scope of work and framing sessions • Data transfer to AL • Initial data QC	• Analysis of surface facilities constraints • Analysis of subsurface constraints	• Identification of de-bottlenecking opportunities • Evaluation of the effect of de-bottlenecking (back-pressure optimization, produced water distribution optimization)	• Preparation of the draft of report • Integration of the comments from FP • Finalization of the report
		DELIVERABLES	• Initial data analysis KOM	• List of key surface and subsurface constraints	• WS: de-bottlenecking opportunities evaluated by the potential effect	• Close out session • Final report

Asset Lead FP	Asset FP
Andrey SEYMENOV Olivier-François GARNIER	Zahra Faisal Al Hashmi (ADNOC Onshore) Mubarak Hulaiman Mubarak Alhameli (ADNOC Onshore) Hector Aguilar (ADNOC Onshore - SE-DEV)

Added value	Production, Growth
-------------	--------------------



Governance

- Regular progress meetings.
 - Be-weekly
- Technical WS: Q3

